

TO-252/TO-251 Plastic-Encapsulate Voltage Regulators

L78M06 Three-terminal positive voltage regulator



FEATURES:

- ※ Maximum output current
IOM: 1A
- ※ Output voltage
VO: 6V
- ※ Continuous total dissipation
PD: 1.25W

MARKING:

78M06 D / U ****
logo (D→252) / (U→251) ****→Date

TYPICAL APPLICATION:

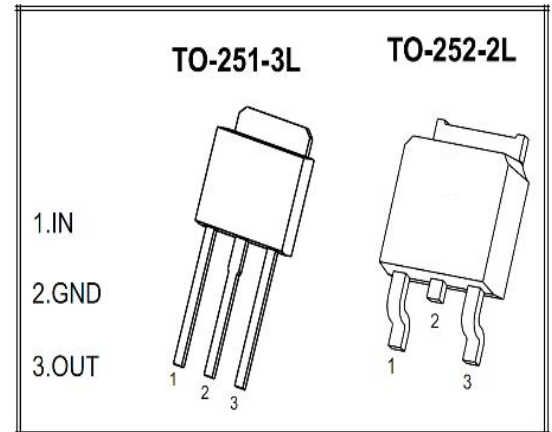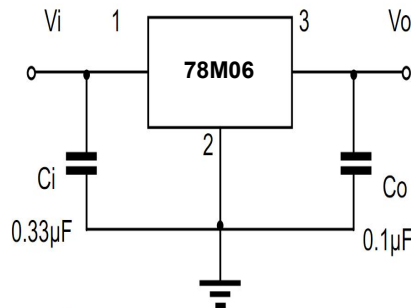

Absolute Maximum ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	Vi	35	V
Thermal Resistance From Junction to air	RθJA	80	°C/W
Operating Junction Temperature Range	TOPR	-25~+125	°C
Storage Temperature Range	TSTG	-55~+150	°C


Electrical Characteristics At Specified Virtual Junction Temperature (Vi=11V, Io=350mA, Ci=0.33μF, Co=0.1μF. Unless Otherwise Specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Output voltage	VO	25°C	5.75	6	6.25	V
		8V≤Vi≤21V, Io=5mA-350mA -25~+125	5.7	6	6.3	V
Load Regulation	ΔVO	Io=5mA-0.5A, Vi=11V 25°C		18	120	mV
		Io=5mA-200mA, Vi=11V 25°C		10	60	mV
Line Regulation	ΔVO	8V≤Vi≤25V, Io=200mA 25°C		5	100	mV
		9V≤Vi≤25V, Io=200mA 25°C		1.5	50	mV
Quiescent Current	Iq	25°C		4.3	6	mA
Quiescent Current Change	ΔIq	9V≤Vi≤25V, Io=200mA -25~+125			0.8	mA
	ΔIq	5mA≤Io≤350mA -25~+125			0.5	mA
Output Noise Voltage	VN	10Hz≤f≤100KHz 25°C		45	200	μV/Vo
Ripple Rejection	Rr	9V≤Vi≤19V, f=120Hz, Io=300mA -25~+125	59	80		dB
Dropout Voltage	Vd	Io=350mA 25°C		2	2.5	V
Short Circuit Current	Isc	Vi=11V 25°C		300		mA
Peak Current	IPK	25°C		0.5		A

Note :


Bypass Capacitors are Recommended For Optimum Stability and Transient Response and Should be located as Close as Possible to the Regulators

Package Dimensions:

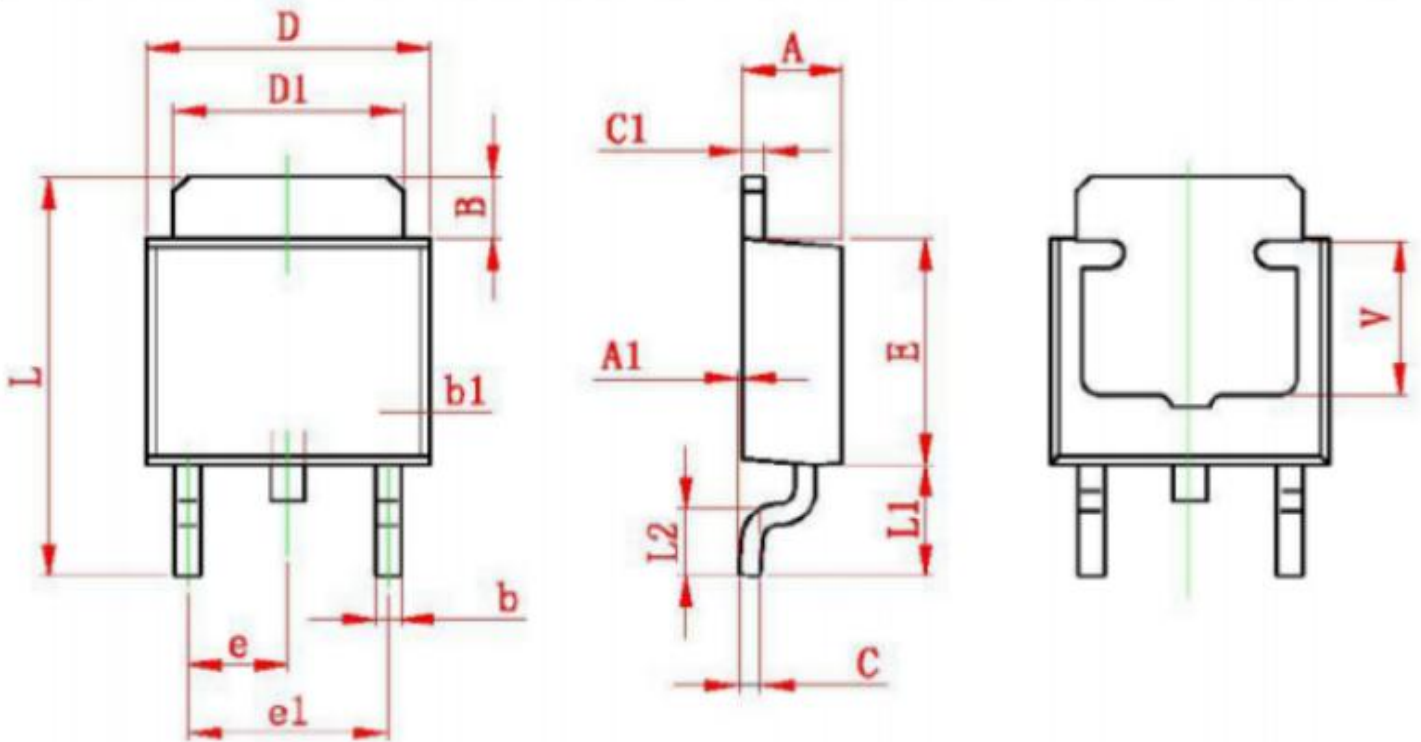

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP		0.091 TYP	
e1	4.500	4.700	0.177	0.185
L	9.500	9.900	0.374	0.390
L1	2.550	2.900	0.100	0.114
L2	1.400	1.780	0.055	0.070
V	3.80 REF		0.150 REF	

Package Dimensions:

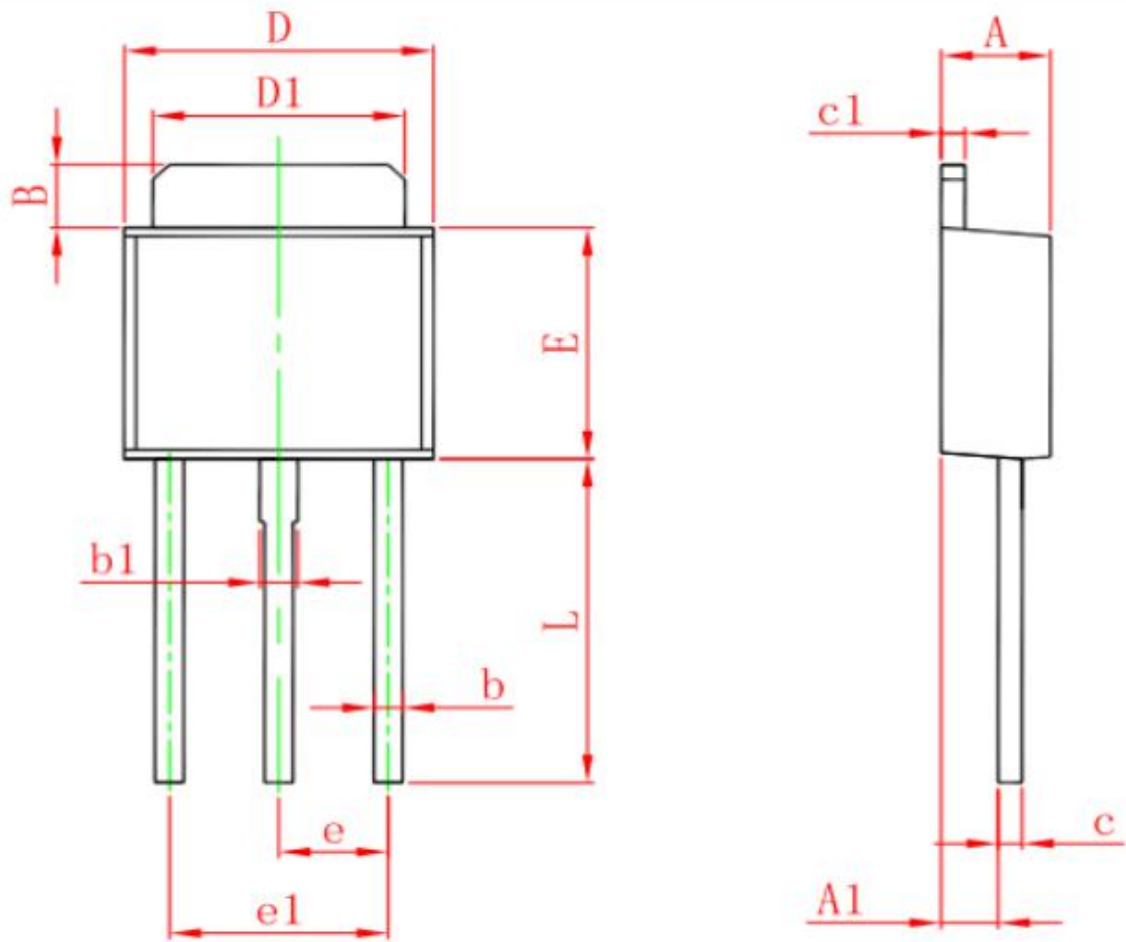

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	1.050	1.350	0.042	0.054
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP.		0.091 TYP.	
e1	4.500	4.700	0.177	0.185
L	7.500	7.900	0.295	0.311